


OTHER **Coleman** PRODUCTS


COLEMAN CATALYTIC HEATER

Here's the safe way to provide comfortable heat in tents, trailers, campers, duckblinds, ice fishing huts and hundreds of other areas where heat is needed. Four different models ranging from 3,000 to 8,000 BTU's. Lets you increase or decrease heat as needed.




WORLD'S FINEST SNOW-LITE® COOLERS

Modern living demands modern proportions. Voted exactly right by thousands of discriminating customers. Insulated with urethane foam and featuring new recessed chrome-plated handles. Cam-type latch with protective shield locks with a twist of the wrist, can't be jarred open — can't be locked accidentally. Rugged Snow-Lite used in a seamless interior and rust-proof base.



WORLD-FAMOUS COLEMAN CAMP STOVES

Join the fun! Select your favorite model and enjoy delicious food everywhere — and for less cost than restaurant meals. Coleman Camp Stoves fold like a suitcase, cook like a range, and cook meals for days on a tank of non-leaded fuel. Available in two- or three-burner models. Also available, Coleman Camp Ovens; lets you bake to perfection anywhere, and Toaster-Griddle-Broiler for stove-top artistry.



YOUR COLEMAN GUARANTEE

All new models of Coleman Outing Products are guaranteed against faulty material or workmanship.

Any part found defective because of imperfect material or workmanship will be replaced without charge when returned with transportation charges prepaid to the Coleman factory, or to the nearest Coleman authorized in-warranty service station.

This guarantee does not, of course, apply to generators on stoves and lanterns, nor to any product where it is evident that damage has developed from improper handling or operation.

NOTICE: The use of any attachment or device that is not expressly approved by The Coleman Company, Inc., to alter or affect the operation of the appliance automatically cancels all warranties, implied or expressed. Furthermore, the Company shall not be liable for any consequences that result from the use of equipment under these circumstances.

Coleman's warranty on repair parts is made null and void by their use on other than **Coleman** manufactured appliances. Coleman's warranty on **Coleman** appliances is made null and void by use of other than genuine **Coleman** repair parts. Always look for this **Coleman** label.


Made in United States of America

THE COLEMAN COMPANY, INC.

General Office and Factory: Wichita, Kansas, U.S.A. 67201
Canadian Office and Factory: Toronto, Canada

1960C001 10-70 P.L.


LITHO IN U.S.A.

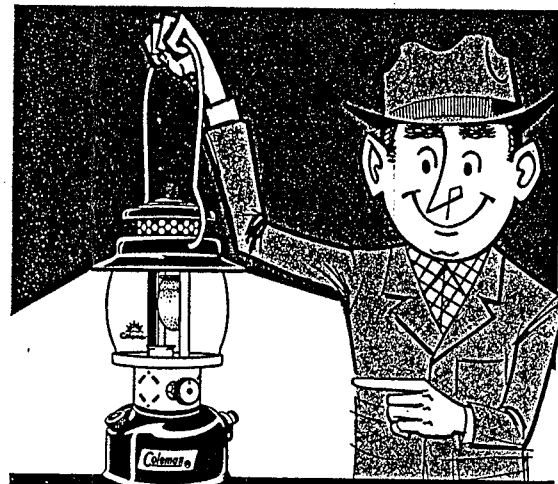


HOW TO USE and ENJOY YOUR NEW...

Coleman 237A KEROSENE LANTERN

PARTS LIST FOR COLEMAN KEROSENE LANTERN 237A

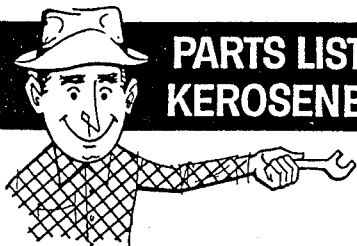

| PART NO. | DESCRIPTION | PART NO. | DESCRIPTION |
|----------|--|----------|------------------------|
| 011-303 | Mantle | 237-2991 | Generator |
| 118B3531 | Tip Cleaner Stem | 237-3041 | Eccentric Block |
| 118B6201 | Valve Stem Packing | 237-310 | Preheater Cup |
| 200-533 | Air Stem | 237-5601 | Fount |
| 202-6491 | Valve Wheel | 237-6531 | Stem Ass'y |
| 203-441 | Ball Nut | 237-6571 | Valve (Less Generator) |
| 216-5091 | Pump Cup | 237B4891 | Base Rest |
| 220B175 | Self-tapping Screw (#4-40 x 5/16 Rd. Sld. Hd.) | 242-550 | Filling Can |
| 220C1401 | Filler Cap | 242-1071 | Push On Nut |
| 236-3231 | Burner Cap and Screen | 242B428 | Wing Nut |
| 236-324 | Burner Tube | 242D5201 | Pump Plunger Ass'y |
| 236-4231 | Bail | 242B5381 | Check Valve |
| 236-4851 | Ventilator | 249-3111 | Spring Clip |
| 236-603 | Connecting Rod | 530-210 | Jamb Nut |
| 236A340 | Ventilator Rod | 530A5071 | Pump Cap Clip |
| 236A3701 | Burner Ass'y (Complete) | 603-2181 | Gas Tip (Marked "I") |
| | | 690-058 | 660 Clear Globe |
| | | 1201D514 | Nut (1/4-20 x 7/16) |

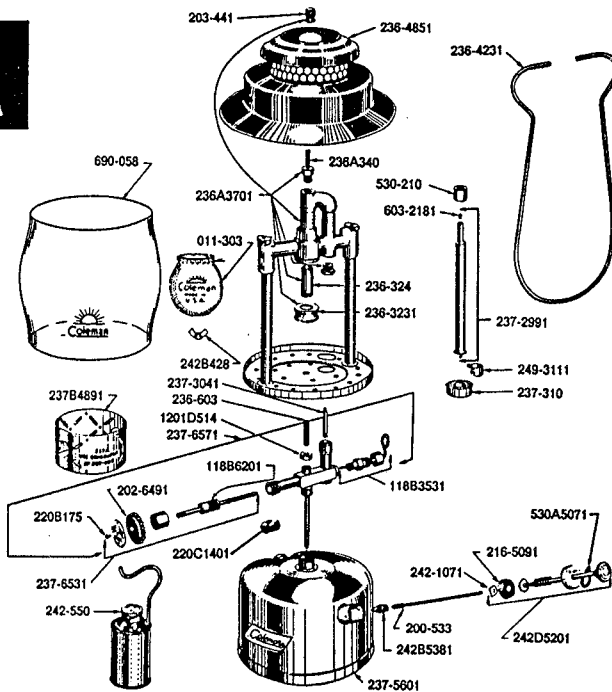

MODEL 237A SHOWN



GENERATOR

The Generator is the heart of your Coleman Lantern. Here liquid fuel is changed into the gas that burns in the mantles. Factory-tested Coleman Generators — precision-built from best-grade materials — are made to fit and function perfectly with other parts.

TO INSTALL

Be sure Fuel Valve is closed. Remove Bail, Ventilator, and Pyrex Globe. Remove Nut which holds Burner and Frame to lantern. Carefully lift Frame up over Generator to avoid damage to Mantle.

Turn Gas Tip Cleaning Lever up. Remove Nut at lower end of Generator. Lift Generator up and unhook Cleaning Needle.

Pull end of Cleaning Needle out of new Generator far enough to hook into hole in Eccentric Block. After hooking Needle to Eccentric Block turn Cleaning Needle Lever down. Slide Nut over Generator and tighten firmly with wrench to prevent a leak.

Reassemble. Be careful when placing Frame down over Generator to avoid breaking Mantle.




GLOBE

The Genuine Pyrex Globe on your Coleman Lantern is made of the best quality heat-resisting glass obtainable. It is glass of superior transparency and light-refracting qualities. However, even Pyrex Globes can be broken. When this happens, you can purchase a new one from your Coleman dealer.

NO. 690-058

ALWAYS USE THE RIGHT KIND OF FUEL

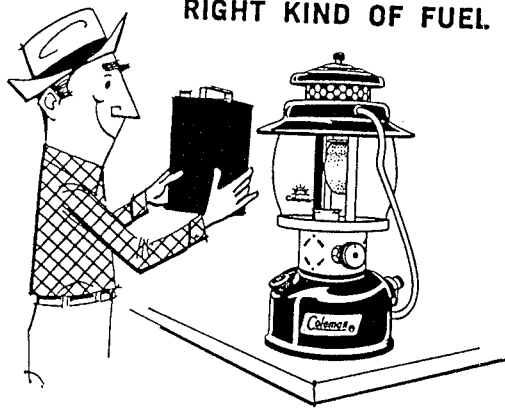

The length of service you get from your lantern and generator depends greatly upon the cleanliness of the fuel you use. Always use clean, fresh white kerosene. Store your kerosene in a clean closed metal can that is air-tight and leak-proof.



TO FILL TANK

Close fuel valve tightly to the right. Remove Filler Cap and fill lantern with two pints of fresh, clean fuel. Lantern should sit level all during filling. Fuel for the lantern may be strained through several thicknesses of finely woven cloth or, more convenient, a No. 199B Coleman Filtering Funnel. After filling, replace Filler cap and tighten firmly with fingers.

Never remove filler cap while lantern is lighted, nor near open flame or excessive heat.

TO PUMP

Fuel Valve and Filler Cap must be closed firmly. Turn Pump Plunger two turns to the left. Place thumb over small hole in end of Pump Plunger and pump 20 to 30 full strokes of air into lantern. Good pressure is important. Now turn Pump Plunger clear to right until tight and push it clear down. Oil Pump Leather occasionally to keep it soft and pliable.




LEFT TO OPEN



RIGHT TO CLOSE




TO TIE ON COLEMAN MANTLE



Remove Bail Nut at very top of lantern, remove Bail, lift off the ventilator and take out the Pyrex Glass Globe.

Tie mantle around groove in burner cap (see drawing). Flat side of mantle should face generator. Distribute folds of mantle evenly at top and cut off surplus string. Burn mantle according to instructions on mantle envelope.

ALWAYS USE GENUINE COLEMAN MANTLES



These are the perfect functional counterpart of the Generator, Air Intake, and Mixing Chamber of Coleman Lanterns. Saturated with top-quality, light-producing chemicals, they are scientifically designed in shape, size, and weave to glow with maximum brilliance in type of illumination approximating natural day-light. Reinforced bottoms and absence of side seams give them longer life. Moisture-proofed and denatured against deterioration. To make sure you get Coleman uniform quality, look for the Coleman name stamped on genuine Coleman Mantles.


Let cool after burning it off before lighting lantern. Good air pressure in the lantern will help to shape it and 30 minutes burning on first lighting will help its strength.

TO LIGHT

Be sure Fuel Valve is closed and Gas Tip Cleaning Lever at base of frame is pointing down.

Fill Preheater Cup with alcohol (do not use gasoline or kerosene), using can provided. Light with match through Lighter Hole. Allow flame to consume nearly all the alcohol, then open Fuel Valve one fourth turn to light Mantle. When Mantle lights, immediately close Fuel Valve to eliminate flare up and smoke. When Mantle begins to dim, open Fuel Valve one fourth turn. Then pump in additional air for maximum light.

If lantern does not burn brightly with Fuel Valve open, rotate Gas Tip Cleaning Lever several times. Lantern may flicker a bit but will immediately burn brightly.

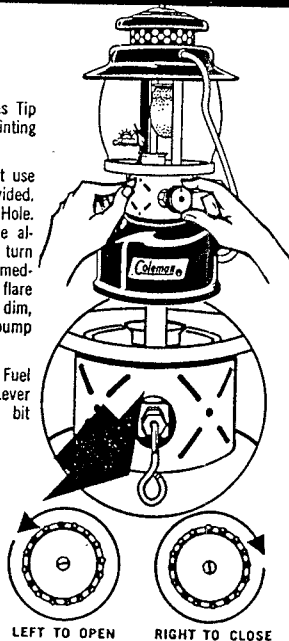

LEFT TO OPEN

RIGHT TO CLOSE


TO TURN OFF

Close Fuel Valve firmly. Light will dim and go out in a few seconds.

COLEMAN LANTERN CARRYING CASE TO PACK, CARRY & STORE


• Durable all-metal case with bail handle... the easy way to store and transport your Coleman Lantern. • Protects lantern against dirt, dust, dents, broken globes. Mantles last longer, too. • Special plastic base insures snug fit. Use with concave side up for lanterns equipped with Coleman Accessory Safe... flat side up for lanterns without safe. • Lantern can be stored hot! Just make sure valve is completely closed and flame is off.

Filtering Funnel, 199B1111
Aluminum with strainer and filtering fabric. Removes water, dirt, impurities from fuel.
Replacement Filter 199-1091.



MODEL 220-567 FOR COLEMAN MODEL 220 LANTERNS
MODEL 228-567 FOR COLEMAN MODEL 228 LANTERNS
AND COLEMAN MODEL 237 LANTERNS

Accessory Safe
Includes generator wrench, two spare mantles and a generator. Snaps tightly onto base of lantern.
220A7101 for Coleman 220 and 228 Lanterns.



GENERAL SUGGESTIONS

IF LANTERN BLAZES AND SMOKES more than a few seconds when first lit, then close valve and relight lantern following instructions.

IF LANTERN DOES NOT LIGHT, check air pressure and fuel content. Remove Generator and unscrew Gas Tip to make sure point of needle has not been bent or curled. Open valve slightly to make sure kerosene will come through valve.

IF MANTLE TURNS BLACK, make sure screens in Burner Caps are clean and open. Check Air Intake Tube for possible obstruction, such as a spider's nest.

IF LIGHT DIMS, check Fuel Valve to be certain it is open. Rotate cleaning lever to remove carbon, if any.

IF LIGHT PULSATES after installation of a new Generator, pump in additional air pressure until light is steady.

IF LANTERN IS ON EMERGENCY STANDBY in case of storm or power failure, empty all kerosene from Fount occasionally, refill with clean, fresh fuel. Store in as cool a place as possible.

IF YOU HAVE OCCASION TO WRITE the dealer or the factory, mention that your Lantern is a Model No. 237A Lantern. If you mail the Lantern, send it less Globe and Ventilator to avoid breakage.

237 / 237A KEROSENE SINGLE MANTLE LANTERN PARTS PRICE LIST

(Manufacture Date 1953-1974)



| ART # | DESCRIPTION | PRICE | PART # | DESCRIPTION | PRICE |
|---------|---------------------|-------|----------|-------------------|-------|
| 18D1361 | MANTLES | 2.00 | 236A3701 | BURNER ASSEMBY | N/A |
| | GASKET R/B | | 118B6201 | PACKING R/B | |
| | 220C1401 | | | 118D6201 | |
| 37-2991 | GENERATOR | 9.13 | 237-310 | PREHEATER CUP | N/A |
| 18B3531 | TIP CLEANER STEM | N/A | 237-3041 | ECCENTRIC BLOCK | N/A |
| 18D6201 | PACKING | .55 | 237-6531 | STEM ASSEMBLY | N/A |
| 30-6381 | CHECK VALVE & STEM | 2.20 | 237-6571 | VALVE ASSEMBLY | N/A |
| 37-5601 | FOUNT R/B 290-6151 | | 201-5511 | ALCOHOL BOTTLE | 3.52 |
| 32-6491 | VALVE WHEEL R/B | | 237A4891 | BASE REST R/B | |
| | 407-6491 | | | 237B4891 | |
| 20-4411 | BALL NUT | 1.75 | 237B4891 | BASE REST | N/A |
| 16-5091 | PUMP LEATHER | 1.65 | 216A5091 | PUMP CUP PKG | 3.00 |
| 20-6381 | GASKET R/B 220C1401 | | 242-550 | FILLING CAN R/B | |
| | | | | 201-5511 | |
| 12-1071 | PUSH ON NUT | 1.76 | 242B428 | WING NUT | N/A |
| 20B175 | SCREW R/B 220E175 | | 242D5201 | PUMP PLUNGER ASSY | 5.50 |
| 20C1401 | FILLER CAP | 2.75 | 249-3111 | SPRING CLIP | N/A |
| 20E175 | SCREW | .22 | 290-6151 | FOUNT | 20.50 |
| 20E1651 | FOUNT R/B 290-6151 | | 407-6491 | VALVE WHEEL | .88 |
| 36-1591 | FOUNT R/B 290-6151 | | 530-210 | JAMB NUT | N/A |
| 36-3231 | BRNR CAP & SCREEN | N/A | 530A5071 | PUMP CAP CLIP | .55 |
| 36-324 | BURNER TUBE | 1.38 | 605-950 | WRENCH | N/A |
| 36-4231 | BAIL | N/A | 690A048 | GLOBE | 6.50 |
| 36-4851 | VENTILATOR | N/A | 690-058 | GLOBE R/B 690A048 | |
| 36-603 | CONNECTING STUD | N/A | 1201D514 | HEX NUT | N/A |
| 36-340 | VENTILATOR ROD | N/A | | | |

160-0781 4.50 7.50

PRICES SUBJECT TO CHANGE WITHOUT NOTICE N/A = NOT AVAILABLE R/B = REPLACED BY

237, 237A

ALCOHOL GENERATING
KEROSENE
SINGLE MANTLE

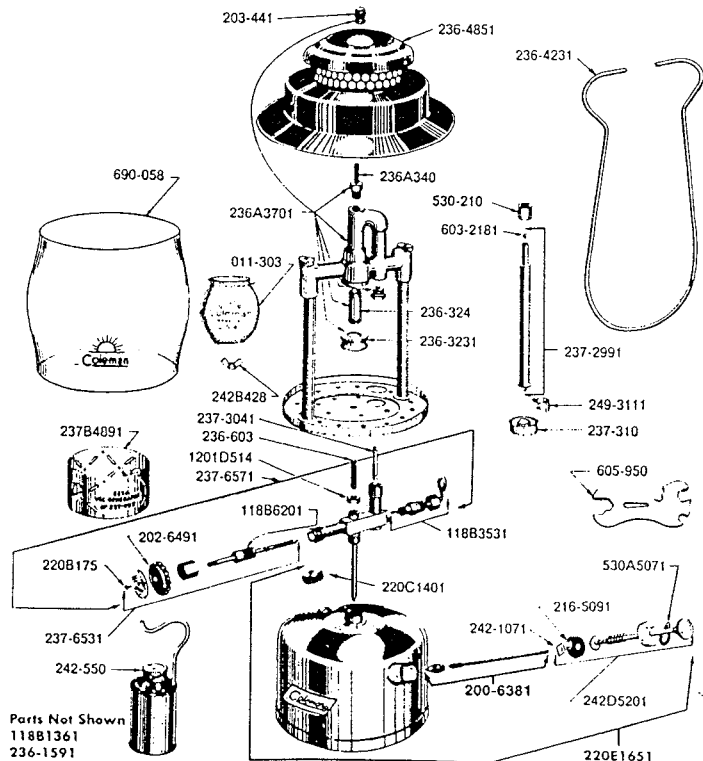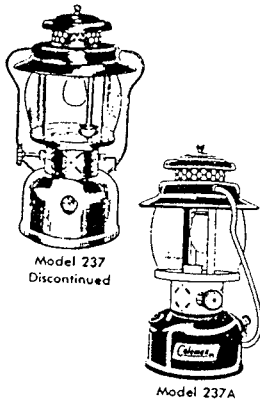

Parts Not Shown
118B1361
236-1591

MODEL 237A SHOWN

| Jel | FINISH | | LANTERN HEIGHT | FUEL CAPACITY |
|------|--------|------------------------|----------------|---------------|
| | Fount | Ventilator (Porcelain) | | |
| 237 | Nickel | Green (7 1/4") | 14 1/2" | 2 Pints |
| 237A | Green | Green (7 1/4") | 14 1/2" | 2 Pints |